BOOSTER PACK

12 / 24 V

STARTPACK PRO 12.24 CI

Ref. 028920
Ref. 068162

GYS
INVEST IN THE FUTURE

The STARTPACK PRO 12.24 CI is a professional autonomous starter for 12 V and 24 V lead batteries (liquid, AGM, EFB, gel...)**. Thanks to its 2 high-performance internal lead batteries, it develops a high starting current. The booster integrates an intelligent charger that perfectly preserves the health of its 2 batteries. Compact, robust and supplied with a trolley, it is ideal for breakdown services on site and in agricultural workshops, trucks, buses or for construction machinery.**

Very powerful 12 / 24 V booster

Its two high-quality internal batteries *(ENERSYS: 2 x 30 Ah)* give the STARTPACK PRO 12.24 CI a high starting current *(up to 6200 A peak)*.
• It starts all vehicles equipped with lead batteries *(liquid, AGM, EFB, gel...)* in a few seconds: 1300 A in 12 V, 1200 A in 24 V.

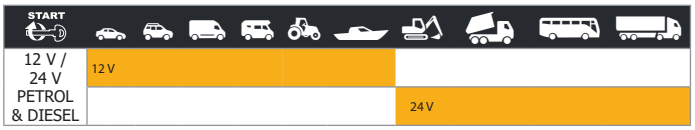

Built-in automatic charger

• Thanks to its powerful built-in 4 A charger (IUoU curve), the STARTPACK PRO 12.24 CI **can be charged 100% from the mains, quickly and unattended.**

• Its **intelligent 7-step charging curve** extends the life and performance of its internal batteries.

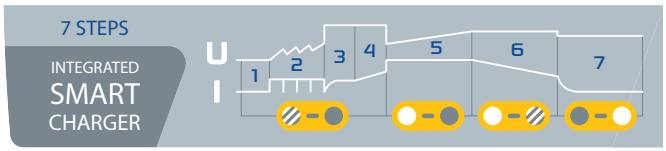

Perfect for on-site work

Compact, the STARTPACK PRO 12.24 CI has a comfortable power-to-weight ratio. **Delivered with its trolley**, it is easily transportable and adapts perfectly to all types of environments (in the workshop or on site).

For safe use

This product provides protection for the vehicles on-board electronics, the charger, the battery and the user.

✓**Battery switch:**
- Protects on-board electronics
- Avoids short circuits.
- Protects against polarity inversion (with audible alarm + indicator light).
- Avoids sparks when connecting the clamps.

INCLUDED :

Starter clamps
600 A / 2 m
50 mm²

Trolley
31 x 55 x 93 cm
45,5 kg

Recharge after each use - When not in use the unit is safe to be left on charge 24/7



FLOATING PROCESS

AUTOMATIC CHARGE

Fuses
(not included)

300 A *(x2)*
ref. 054561

START											
INSIDE 12V		1V/C	Cranking CC	Peak Battery	Charger Inside	Protections		fuse		cm	kg
2 x 30 Ah *ENERSYS*	12 V	1300 A	2400 A	6200 A	4 A	✔	✔	300 A	2 x 2 m ø50 mm²	14 x 35 x 56	34 (STARTPACK only) 45,5 (STARTPACK + trolley)
	24 V	1200 A	2250 A	3100 A							

CE

FABRICAT ÎN FRANȚA

www.gys.fr