

INSTRUCTIONS FOR: GROOVE AXLE NUT SOCKET WITH 6 STUD - MAN/BENZ 3/4" SQ DRIVE Model No: CV007

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THE TOOL CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

. SAFETY INSTRUCTIONS

- WARNING! Ensure Health and Safety, local authority and general workshop practice regulations are adhered to when using tools.
 X DO NOT use tool if damaged.
- Ensure that a vehicle which has been jacked up is adequately supported with axle stands and that the wheels are chocked, refer to the vehicle manufacturer's service instructions, or a proprietary manual.
- Wear approved eye protection. A full range of personal safety equipment is available from your Sealey dealer.
- Wear suitable clothing to avoid snagging. DO NOT wear jewellery and tie back long hair.
- ✓ Maintain tool in good and clean condition for best and safest performance.
- ✓ When not in use, clean tool, and store it in safe, dry, childproof location.

<u>IMPORTANT</u>: This manual is provided as a guide only, refer to the vehicle manufacturer's service instructions, or a proprietary manual, to establish the current procedure and data.


- WARNING! Failure to heed safety and warning instructions may result in damage and/or personal injury and will invalidate the warranty.
- WARNING! The warnings, cautions and instructions referred to in this manual cannot cover all possible conditions and situations that may occur. It must be understood that common sense and caution are factors which cannot be built into this product, but must be applied by the operator.

2. APPLICATION / SPECIFICATION

Chrome Molybdenum drop forged, six tooth impact socket designed for the removal and refitting of axle nut fitted to MAN TGA and Benz trucks.

Α	. Drive:	.3/4"Sq/H60
Β		
C	. OuterØ:	110mm
D	. Tooth Width:.	12mm



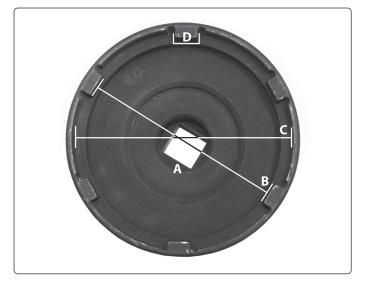

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. **IMPORTANT:** No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group, Kempson Way, Suffolk Business Park, Bury St. Edmunds, Suffolk, IP32 7AR



Original Language Version

CV007 Issue: 1 - 18/01/13)