

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will give you years of trouble free performance if these instructions are carefully followed and the product is correctly maintained.





IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. PLEASE RETAIN THESE INSTRUCTIONS FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- p **WARNING!** *Ensure health & safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment.*
- 3 Familiarise yourself with product application and limitations, as well as the specific potential hazards peculiar to this product.
- 3 Maintain the pump in good condition (use an authorised service agent).
- 3 Replace or repair damaged parts. *Use genuine parts only. Non authorised parts will invalidate the warranty.*
- 3 Use only to pump NON-Corrosive fluids such as oil, anti-freeze, degreasants, solvents, agricultural and industrial chemicals, and the like.
- 3 Ensure safety eye protection and protective clothing are worn when using this product.
- 3 Keep the work area clean, uncluttered and ensure there is adequate lighting.
- 3 Maintain correct balance and footing. Ensure the floor is not slippery.
- 3 Keep children and unauthorised persons away from the working area.
- 3 Dispose of waste liquids in accordance with local authority regulations.
- 7 DO NOT use to extract corrosive fluids.
- 7 DO NOT dismantle, tamper with or adapt the pump for any purpose other than for which it is designed.
- 7 DO NOT use the unit if it has been dropped or mishandled, check the unit to ensure there is no damage.
- 7 DO NOT use the pump as a handle to move the fluid drum.
- 3 Keep the pump clean and store in a safe dry, childproof location.
- p **WARNING!** DO NOT allow uncontrolled discharge of fluids thus polluting the environment.

2. APPLICATION

Polypropylene lever pump with steel rod and diptube, suitable for use with oils, anti-freeze, degreasants and other non corrosive fluids. Features polyoxymethylene handle for prevention against aggressive fluids melting the handle. Fitted with 360° outlet nozzle. Suitable for 205ltr drums. Delivers approximately 400ml per stroke.

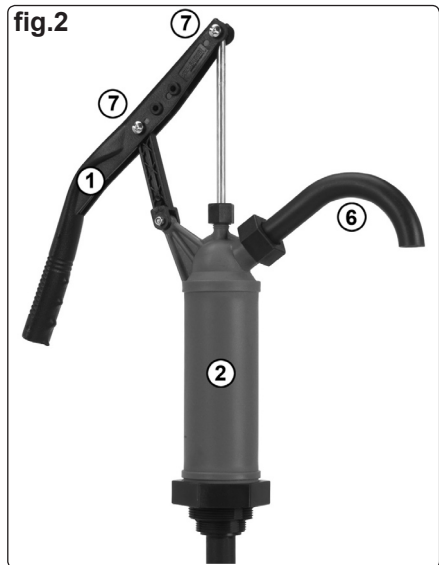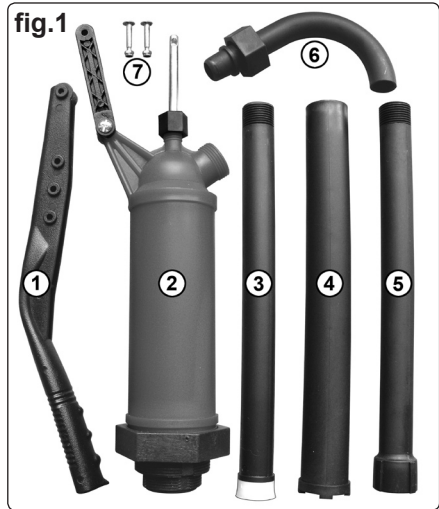

3. ASSEMBLY

3.1 Unpack and identify the parts shown in fig.1.

1. Handle
2. Pump Body
3. Lower tube (with seal)
4. Sliding Tube
5. Upper Tube
6. Spout
7. Pivot bolts & nuts x 2


3.2 Assemble the Spout (6) to the Pump Body (2).

3.3 Attach the handle (1) to the plunger and pivot on the pump body using the pivot Bolts (7) as shown in fig.2. Choose the outer pivot hole on the handle (1) for the longest stroke.

3.4 Assemble the extendable dip tube as shown in fig.3. Firstly insert the lower tube with seal (3) into the bottom of the sliding tube (4). See fig.3A. Push on the lower tube so that it emerges from the top of the sliding tube as shown in fig.3B. Screw the top of the lower tube (3) into the bottom of the pump body (5). See fig.3C.

3.5 Adjust length of dip tube and insert into container. Screw base of pump into container opening. The unit is now ready for pumping.

fig.3

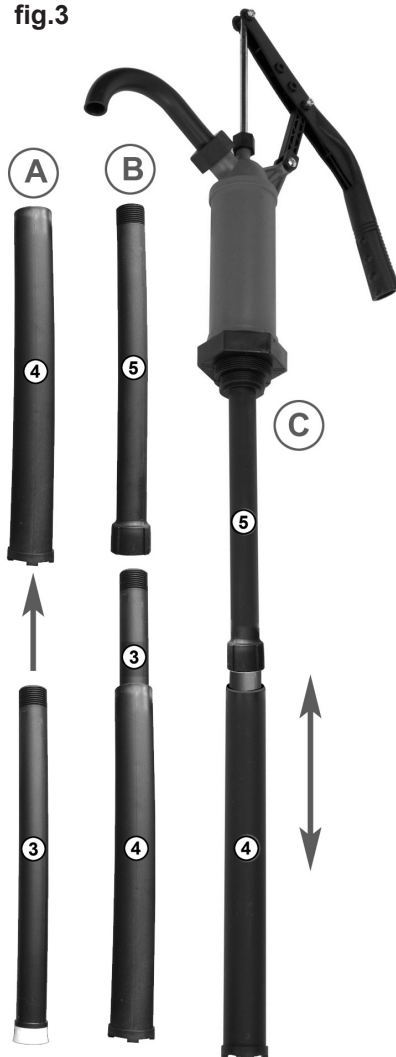

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.
IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
Kempson Way, Suffolk Business Park,
Bury St. Edmunds, Suffolk,
IP32 7AR

01284 757500

01284 703534



www.sealey.co.uk



sales@sealey.co.uk